

# Heliospheric Imager – Scientific Operations

Ø HI Operations Document – R. Harrison

(presented by Dave Neudegg – SciOps for Cluster, Mars Express, Double Star)

Ø HI Image Simulation – C. Davis & R. Harrison

Ø HI Operations Scenarios – R. Harrison & S. Matthews

Ø HI Beacon Mode Specification – S. Matthews




THE UNIVERSITY  
OF BIRMINGHAM



CCLRC  
Rutherford Appleton Laboratory






## Heliospheric Imager – Scientific Operations

Ø HI in a nutshell:

First opportunity to observe Earth-directed CMEs along the Sun-Earth line in interplanetary space - the first instrument to detect CMEs in a field of view including the Earth!


First opportunity to obtain stereographic views of CMEs in interplanetary space - to investigate CME structure, evolution and propagation.


Method: Occultation and baffle system, with wide angle view of the heliosphere, achieving light rejection levels of  $3 \times 10^{-13}$  and  $10^{-14}$  of the solar brightness.



# Heliospheric Imager – Scientific Operations

Ø HI in a nutshell:

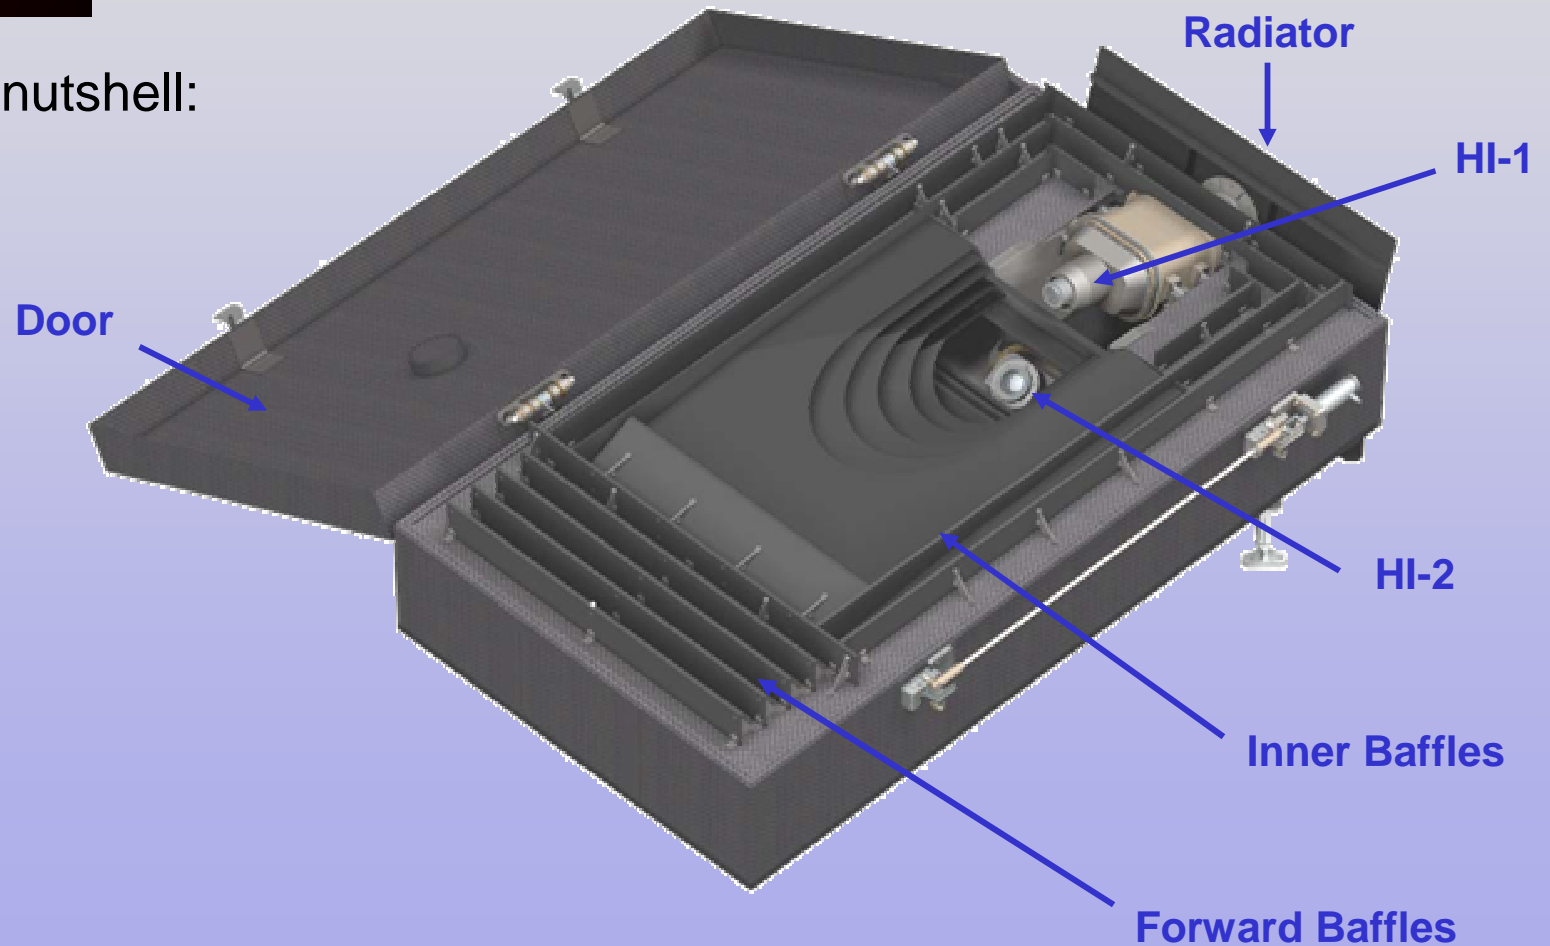




# Heliospheric Imager – Scientific Operations

Ø HI in a nutshell:

	HI-1	HI-2
Instrument Type	Externally-Occulted Coronagraph	Externally-Occulted Coronagraph
Centre of Field-of-View Direction	Along Sun-Earth Line $\theta = 13.65$ deg	Along Sun-Earth Line $\theta = 53.35$ deg
Angular Field-of-View	20 deg	70 deg
Coronal Coverage	12 - 84 $R_{\text{sun}}$	66 - 318 $R_{\text{sun}}$
Overlap With COR2	12 - 15 $R_{\text{sun}}$	N/A
Overlap With HI-1	N/A	66 - 84 $R_{\text{sun}}$
Baseline Image (2 x 2 Binning)	1024 x 1024	1024 x 1024
Image Pixel Scale (Binned)	70 arcsec	4 arcmin
Spectral Bandpass	630 - 730 nm	400 - 1000 nm
Exposure Time	12 - 20 sec	60 - 90 sec
Nominal Images Per Sequence	70	50
Required Cadence (Per Sequence)	60 min	120 min
Brightness Sensitivity	$3 \times 10^{-15} B_{\text{sun}}$	$3 \times 10^{-16} B_{\text{sun}}$
Straylight Rejection	$3 \times 10^{-13} B_{\text{sun}}$	$10^{-14} B_{\text{sun}}$
Brightness Accuracy	10%	10%



# Heliospheric Imager – Scientific Operations


## Ø HI Operations Document


Ø HI Operations Document –  
Version 4 released Dec 1, 2003

Ø Author: Richard Harrison, HI  
Principal Investigator

Ø Document located at UK Web  
site: <http://www.stereo.rl.ac.uk>

Ø The HI team is not aware of any  
other instrument operations  
document on STEREO.

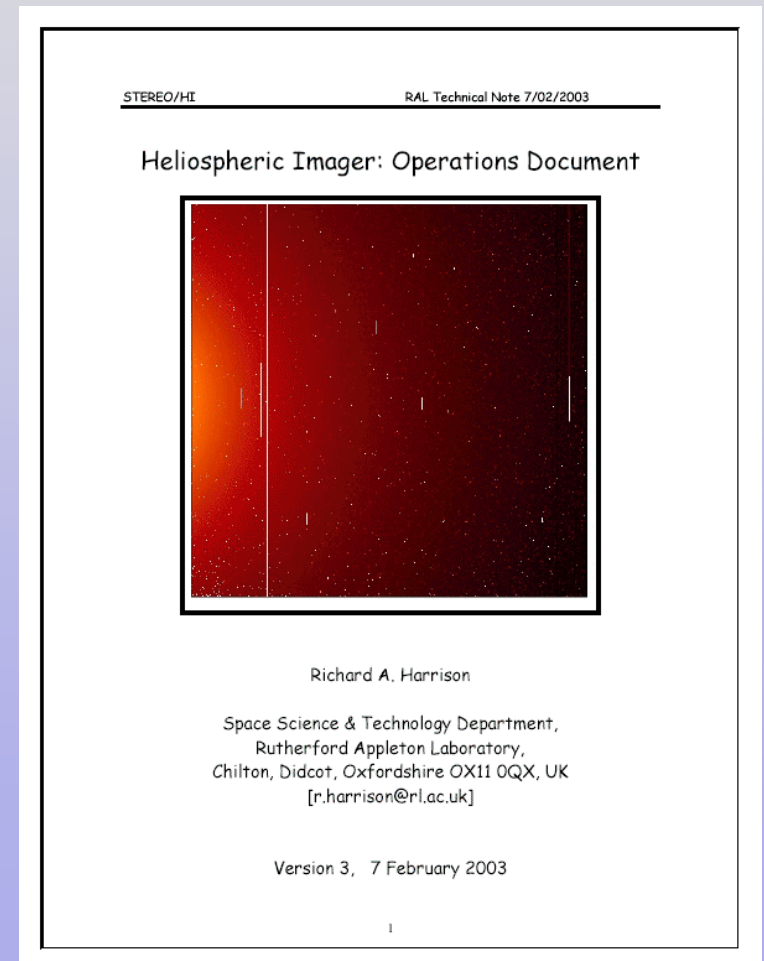




# Heliospheric Imager – Scientific Operations

## Ø HI Operations Document

Ø Purpose: Sets out plans for the operation of the Heliospheric Imager. It is intended that this information be used as an input to the discussion on

- Ø the development of on-board and ground software (including planning tool software, archive software and data handling, inspection and analysis software),
- Ø payload operations planning,
- Ø commanding,
- Ø monitoring and data receipt,
- Ø data handling and archiving.


*In short – it spells out the requirements on operation and software.*



# Heliospheric Imager – Scientific Operations

Ø HI Operations Document – contents:

- Ø Operations planning and implementation
- Ø HI Scientific operation
- Ø Data monitoring and archiving
- Ø Image processing and calibration requirements
- Ø Instrument monitoring and maintenance
- Ø Commissioning plan
- Ø The beacon mode
- Ø Software requirements
- Ø Scientific operations sequences




## Heliospheric Imager – Scientific Operations

### Ø HI Operations Document:

Ø With regard to software and operations requirements, the HI Operations Document lists 34 requirements which must be considered by the SECCHI software team and those planning the operations facilities.

Ø These requirements range from flexibility of programming parameters such as exposure times, to the return of partial frames, from cosmic ray cleaning to the definition of the beacon mode.





## Heliospheric Imager – Scientific Operations

### Ø HI Operations Scenarios:

Ø With regard to HI Scientific Operations Sequences, we have continued the design of specific operations schemes, aimed at addressing specific scientific questions.

Ø This is used to define the operation and its flexibility and comes out of the highly successful ‘Blue Book’ studies of CDS/SOHO.


Ø The products are a clear understanding of how we wish to use the instrument, and clear definitions of the requirements on software and operations.

Ø 15 scenarios so far – next slide...



# Heliospheric Imager – Scientific Operations


<b><i>Study-Programme-Scenario</i></b>	<b><i>Author</i></b>
Synoptic CME programme	R. Harrison
Beacon mode *	Matthews, Harrison, Davis
Impact of CME on Earth	R. Harrison
Understanding how observations at L1 & SECCHI are related	P. Cargill
CMEs in interplanetary space *	P. Cargill
3-D structure of interplanetary CMEs *	L. Green
CME onset *	S. Matthews
Particle acceleration at CME shocks	S. Matthews
The relationship between CMEs and magnetic clouds	S. Matthews
Boundary regions between fast & slow streams in the solar wind	A. Breen
Development of co-rotating interaction regions	A. Breen
Solar wind microstructure	A. Breen
Differential drift velocities in the fast & slow solar winds	A. Breen
Remote solar wind measurements from 3-D obs. of cometary ion tails	G. Jones
Interplanetary acceleration of ICMEs *	M. Owens



# Heliospheric Imager – Scientific Operations

Ø HI Scientific Operations Scenarios – the Synoptic Mode:

	<b>HI-1</b>	<b>HI-2</b>
<b>Image array</b>	<b>1024x1024 (2kx2k summed)</b>	<b>1024x1024 (2kx2k summed)</b>
<b>FOV</b>	<b>20° (3.65-23.65)</b>	<b>70° (18.35-88.35)</b>
<b>Nominal Exposure</b>	<b>12 s</b>	<b>60 s</b>
<b>Summed Exposures</b>	<b>70</b>	<b>60</b>
<b>Synoptic Cadence</b>	<b>1 hr</b>	<b>2 hr</b>
<b>Telemetry Rate</b>	<b>2.9 kbit/s</b>	<b>1.5 kbit/s</b>



## Heliospheric Imager – Scientific Operations

Ø The Beacon Mode –

Ø Provided for quick data receipt, for space weather purposes


Ø HI is a key player in this – the only instrument to see CMEs with Earth within the boundary of the FOV

Ø Options:

Ø Reduced resolution images;

Ø N-S strip Sunward of Earth;

Ø Partial images.




## Heliospheric Imager – Scientific Operations

### Ø The Beacon Mode –

#### Ø Current plan:

Returned image	256x256 pixel image (summed from 2048x2048 array on board)
Rate	1 image per hour, alternately HI-1 and HI-2.
Pixel depth	32 bits (defined by on board summed data)
Nominal telemetry	588 bit/sec.

Note: The beacon mode must be programmable so we can explore different approaches particularly in the early mission.



# Heliospheric Imager – Scientific Operations

## **‘MISSION PLANNING CONCEPT’ (GSDR requirement?)**

A. Payload Master Science Plan / Strategy (incl. campaigns, maneuvers etc)

**[SCIENCE: Long Cycle ]**

**Science Working Team (SWT-Science community)**

**Science Operations Working Group (SOWG-PI-PST)**

-----

B. Instrument Programme-Scenario-Mode **[SCI-OPS: Medium Cycle]**

**Payload Operations Center (POC)**

**Science Operations Working Group (SOWG-PI-PST)**

-----

C. Command Sequences (CSEQs), Telecommands (TCs)

**[OPS: Short Cycle]**

**Mission Operations Center (MOC)**

**Payload Operations Center (POC)**